

S-LINK-2



Dual Channel, PC-Based Power and Energy Monitor



Monitors

Energy Detectors


Power Detectors

OEM Detectors

Calorimeters

Diffractive Optics

Beam Diagnostics

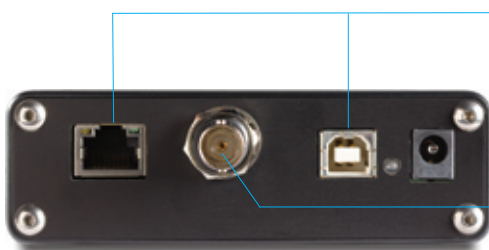


Key Features

- 1 **Reads Both Power and Energy**
Thermopiles and pyroelectrics
- 2 **PC-Based**
Connects to your PC with included software
- 3 **Serial Commands**
Serial commands are available on all versions to let you take full control
- 4 **Fastest Data Transfer Rate**
Get all the points transferred directly into your PC at 10 kHz/Channel
- 5 **USB or Ethernet**
Chose your favorite communications port. The USB version is port-powered
- 6 **External Trigger**
Every model comes standard with a 2.4 V to 24 V external trigger



* Also traceable to **NRC-CMRC**



Accessories

- » **USB Cable**
Additional USB Cable.
- » **Ethernet Cable**
Additional Ethernet Cable for the Ethernet version.


- » **Protective Pouch**
Protect your monitor from scratches and dust.



- » **Pelican Carrying Case**
We offer a robust hard shell polymer carrying case.



SPECIFICATIONS

Model	S-LINK-2
	
Detector Types	Thermopiles, Pyroelectrics
Display	PC-Based

POWER METER SPECIFICATIONS	S-LINK-2
Power Range	1 μ W to 30 kW
Monitor Accuracy	± 0.75 % for 25% to full scale
Statistics	Current Value, Max, Min, Average, Std Dev., RMS & PTP Stability, Time

ENERGY METER SPECIFICATIONS	
Energy Range	80 nJ to 30 kJ
Resolution (Digital)	Normal Mode: Current scale/4096
Monitor Accuracy	
<500 Hz (MB), <1200 Hz (MT)	1%
500 to 1 200 Hz (MB)	2%
1 200 to 6 000 Hz (MT)	3%
6 000 to 10 000 Hz (MT)	6%
Real Time Data Transfer	10 kHz/Channel in normal mode, no missing point
Statistics	Current Value, Max, Min, Average, Std Dev., RMS & PTP Stability, Pulse #, repetition Rate, Average Power

DETECTOR COMPATIBILITY	
Thermopile	Average Power & Single Shot Energy
Pyroelectric	Pulse Energy

GENERAL SPECIFICATIONS	
Number of Channels	2
Digital Display	Computer Screen
Data Display	Real Time, Ratio, Line Plot, Histogram, Statistics and 3D Histogram
Serial Commands and Data Transfer Via	USB (standard) or Ethernet (option) ^a
Real Time Data Transfer Rate	10 kHz/Channel in normal mode, no missing point (for pyroelectrics only) ^b
Dimensions	106W x 34H x 147D mm
Weight	0.424 kg
External Power Supply (Ethernet version only)	100/240 VAC 50-60 Hz to 9 VDC 1.66 A

ORDERING INFORMATION		
Full Product Name	S-LINK-2	S-LINK-2 (Ethernet) ^a
Product Number	201030	201170

a. The Ethernet version also includes the USB output.

b. Actual rate may depend on the computer.